


StyleView: Point-of-Care and Everywhere

Our latest StyleView® solutions:
industry-leading carts
and point-of-care wall mounts



Mounting and
Mobility Solutions
for Your Entire Facility



**JUST
STAND
.ORG**

Point-of-care and everywhere

Healthy computing starts with understanding the diverse needs required to bring EMR, eMAR, PACS and CPOE to the point of care. With almost 30 years experience in creating ergonomic solutions for computer users worldwide, and 20 years in healthcare alone, Ergotron is uniquely qualified to help you configure options and design workstations that fit workflow throughout the entire facility.

LX Sit-Stand Arm highlights

- 20" (51 cm) height range allows users to move between sitting and standing positions while they interact with the display
- Holds a large display, up to 25 lbs (11,3 kg)
- Secure installation – locking connections between arm, extension and base
- Rotation Stop on wall mount base limits turn of extension base connection to 180°, preventing extension from contacting wall
- Ergonomic Keyboard Arm is very stable for extensive data entry




LX Sit-Stand Wall Mount System


LX Wall Mount System

Part # (color)	Medium CPU Holder (silver): 45-358-026 (polished aluminum) Small CPU Holder (black): 45-359-026 (polished aluminum)	Medium CPU Holder (silver): 45-247-026 (polished aluminum) Small CPU Holder (black): 45-253-026 (polished aluminum)
Includes	10" and 34" (25.4 and 86.4 cm) Wall Tracks with (2) black track covers, LX Sit-Stand Wall Mount LCD Arm, LX Sit-Stand Keyboard Arm, wrist rest, mouse holder, CPU Holder, two (2) 10" (25.4 cm) cable channels, mounting kits for hollow-wall and wall-stud installation	LX Wall Mount LCD Arm, LX Keyboard Arm, CPU Holder and 10" (25.4 cm) Wall Track, wrist rest, mouse holder, 34" (86.4 cm) Wall Track, two (2) 10" (25.4 cm) cable channels, anchor hardware kit
Typical LCD Size	≤ 42"	≤ 24"
LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.		
Weight Capacity	LCD 7–25 lbs (3,2–11,3 kg) Keyboard ≤ 5 lbs (2,2 kg) CPU ≤ 40 lbs (18 kg)	LCD 7–20 lbs (3,1–9,1 kg) Keyboard ≤ 5 lbs (2,2 kg) CPU ≤ 40 lbs (18 kg)
Lift	LCD 20" (51 cm) Keyboard 20" (51 cm)	LCD 13" (33 cm) Keyboard 13" (33 cm)
Tilt	LCD 75° ↑ 70° / ↓ 5°	LCD 75° ↑ 70° / ↓ 5° Keyboard 80°
Pan	360° Rotation Stop on wall-mount base limits turn of extension-base connection to 180°, preventing extension from contacting wall	360°
Rotation	360°	90° Portrait to landscape screen rotation
VESA	75 x 75, 100 x 100, 200 x 100, 200 x 200 mm Optional VESA Bracket Adaptor Kit (97-759) can be ordered separately for MIS-F interface with hole pattern of 400 x 200, 400 x 300 or 400 x 400 mm	MIS-D
Depth	Folds to 6.8" (17,3 cm)	Folds to 5.3" (13,5 cm)
Extension	LCD ≤ 33" (84 cm) Keyboard ≤ 42" (107 cm)	LCD ≤ 25" (64 cm) Keyboard ≤ 35" (89 cm)
Warranty	5 years	5 years



See how Ergotron products are used every day.
Healthcare Interactive Virtual Tour
healthcare.ergotron.com

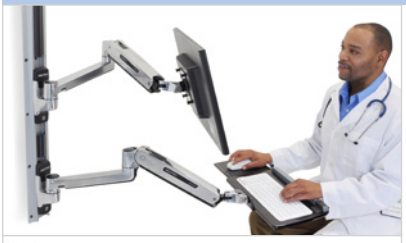



Triangle of Care

Create the connection between you, your patient and their information



See "Ergotron StyleView: A Healthy Groove" movies.ergotron.com

Ergotron products allow computer systems to be easily and ergonomically positioned for any user. The effect? Minimizing space requirements and maximizing efficiency.

- **Ease of motion** – quick adjustment; easily adjust to the point-of-care
- **True ergonomic designs** – create a comfortable work environment for you
- **Space-saving technologies** – place equipment where needed

OSHPD
Office of Statewide Health Planning and Development

Ergotron's wall mount products received OSHPD OPA Pre-approval numbers for mounting in hospitals and healthcare facilities throughout California on October 13, 2009. These standards help ensure patient safety during an earthquake and help make it possible for facilities to continue to function and care for the injured after an earthquake.

OPA #	Applicable wall mount solution/configuration
2338-07	Wall Track and all possible associated arms – direct to stud (16" on center)
2339-07	Wall Track and all associated arms (including StyleView Vertical Lift) – external mount
2341-07	StyleView Vertical Lift – internal mount
2340-07	StyleView Enclosure – direct to stud (16" on center)

To learn more about Ergotron's commitment to OSHPD compliance visit www.ergotron.com



StyleView Sit-Stand Enclosure





StyleView VL Enclosure


Part # (color)	60-610-062 (white) 60-610-060 (black)	60-595-062 (white)
Includes	Enclosure, velcro kit (attaches keyboard to keyboard tray), cable management wrap, antimicrobial wrist rest. Wall footprint 38.2"H x 26.6"W (97 x 67,5 cm)	Enclosure, wall plate, mounting template, vertical lift, slide-out keyboard tray, wrist rest, mouse pouch, scanner holder, internal cable management, batteries, monitor mounting hardware, wall mounting hardware, keys
Typical LCD Size	≤ 22" Maximum monitor physical dimensions 20.5"W x 13.5"H x 2.5"D (52,1 x 34,3 x 6,4 cm). Monitor depth greater than 2.5" (6,4 cm) is allowable, however screen will protrude beyond profile of unit in such cases	≤ 22" Maximum monitor physical dimensions 20.7" W x 14.7" H x 2.8" D (52,6 x 37,3 x 7 cm). Assumes VESA hole pattern is centered on the back of the display
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>		
Weight Capacity	≤ 39 lbs (17,7 kg) Listed weight capacity represents total load. CPU 3–10 lbs (1,4–4,5 kg); monitor 7–12,5 lbs (3,2–5,7 kg); keyboard and worksurface 0,5–1,5 lbs (0,2–0,7 kg)	8–33 lbs (3,6–14,9 kg) Listed weight capacity represents total load, including monitor and contents of keyboard tray, mouse pouch and scanner holder. Maximum load capacity: monitor pivot 18 lbs (8,2 kg); CPU compartment 20 lbs (9,1 kg); door/worksurface 50 lbs (22,6 kg)
Lift	20" (51 cm)	9" (23 cm)
Tilt	—	—
Pan	—	LCD 10° Display size may restrict motion. Keyboard 120°
Rotation	—	—
VESA	MIS-D	MIS-D
Depth	3.8" (9,7 cm) closed 19.3" (48,9 cm) open	6.75" (17 cm) closed 20.6" (53 cm) open
Warranty	5 years 1-year warranty on all electronic components (excludes AA batteries)	5 years 1-year warranty on all electronic components (excludes AA batteries)

Worksurface with pull-out keyboard tray facilitates caregiver workflow



- ① Patented CF lift-and-pivot motion technology provides premium 25" (63,5 cm) LCD height adjustment, portrait-to-landscape rotation and 30° tilt
- ② Durable, easy-to-clean exterior composed of aluminum and high-grade plastic
- ③ Integrated mouse and barcode scanner holder provide easy access
- ④ Fold-down worksurface/keyboard tray to support workflow needs. Worksurface is 22.75"W x 10.6" D (57,8 x 26,9 cm). Keyboard tray is 18.6"W x 9"D (47,2 x 22,8 cm)
- ⑤ Ergonomic back-tilt keyboard tray ensures wrists remain in a neutral position during data entry
- ⑥ Clean, concealed and neat routing of cables through the expansive cable management system
- ⑦ Extend LCD and keyboard up to 43" (109 cm) from wall; fold equipment back out of the way when not in use. With worksurface in storage position, system depth is as little as 8" (20,3 cm). With keyboard in storage position, system depth is as little as 12" (30,5 cm)
- ⑧ Optional Extender Arm (45-261-026) increases range of motion for even greater reach

	 StyleView Sit-Stand Combo Arm with Worksurface	 StyleView Sit-Stand Combo Arm	 StyleView Sit-Stand Combo System with Worksurface	 StyleView Sit-Stand Combo System
Part # (color)	(polished aluminum) Sit-Stand Combo Arm: 45-260-026	(polished aluminum) Sit-Stand Combo Arm: 45-266-026	(polished aluminum) Sit-Stand Combo Arm, medium CPU holder and wall track: 45-270-026 Sit-Stand Combo Arm, small CPU holder and wall track: 45-272-026	(polished aluminum) Sit-Stand Combo Arm, medium CPU holder and wall track: 45-271-026 Sit-Stand Combo Arm, small CPU holder and wall track: 45-273-026
	Extender Arm (optional) 45-261-026 (polished aluminum)	Extender Arm (optional) 45-261-026 (polished aluminum)	Extender Arm (optional) 45-261-026 (polished aluminum)	Extender Arm (optional) 45-261-026 (polished aluminum)
Includes	Sit-Stand Combo Arm with worksurface, wall mount bracket, track mount bracket kit, height-adjustable LCD mount, wrist rest, scanner and mouse holder, worksurface with integrated keyboard tray, VESA monitor mounting kit, cable ties	Sit-Stand Combo Arm, wall mount bracket, track mount bracket kit, height-adjustable LCD mount, wrist rest, scanner and mouse holder, integrated keyboard tray with left/right mouse tray, handle, VESA monitor mounting kit, cable ties	Sit-Stand Combo Arm with worksurface, 34" Wall Track with (2) black track covers, CPU Holder, CPU spacer, (2) 10" cable channels, CPU and Arm track mount bracket kits, Wall Track fasteners for concrete and wood, CPU direct wall mount kit, height-adjustable LCD mount, wrist rest, scanner and mouse holders, integrated keyboard tray, handle, VESA monitor mounting kit, cable ties	Sit-Stand Combo Arm, 34" Wall Track with (2) black track covers, CPU Holder, CPU spacer, (2) 10" cable channels, CPU and Arm track mount bracket kits, Wall Track fasteners for concrete and wood, CPU direct wall mount kit, height-adjustable LCD mount, wrist rest, scanner and mouse holders, integrated keyboard tray with left/right mouse tray, handle, VESA monitor mounting kit, cable ties
Typical LCD Size	≤ 24"	≤ 24"	≤ 24"	≤ 24"
LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.				
Weight Capacity	Display 6–18 lbs (2,7–8,2 kg); keyboard, mouse and barcode scanner 4 lbs (1,8 kg) and up to 10 lbs (4,5 kg) on worksurface	Display 6–18 lbs (2,7–8,2 kg) or up to 25 lbs (11,4 kg) with tilt and lift lock out features engaged, keyboard, mouse and barcode scanner 4 lbs (1,8 kg)	Display 6–18 lbs (2,7–8,2 kg); keyboard, mouse and barcode scanner 4 lbs (1,8 kg) and up to 10 lbs (4,5 kg) on worksurface; 45-270-026: CPU 50 lbs (22,7 kg) 45-272-026: CPU 40 lbs (18 kg)	Display 6–18 lbs (2,7–8,2 kg) or up to 25 lbs (11,4 kg) with tilt and lift lock-out features engaged; keyboard, mouse and barcode scanner 4 lbs (1,8 kg); 45-271-026: CPU 50 lbs (22,7 kg) 45-273-026: CPU 40 lbs (18 kg)
Lift	LCD and keyboard adjust 20" (51 cm) in tandem with single-motion; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (64 cm)	LCD and keyboard adjust 20" (51 cm) in tandem with single-motion; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (64 cm)	LCD and keyboard adjust 20" (51 cm) in tandem with single-motion; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (64 cm)	LCD and keyboard adjust 20" (51 cm) in tandem with single-motion; LCD adjusts 5" (13 cm) independently; maximum LCD height adjustment 25" (64 cm)
Tilt	LCD 30° ↑ 25° / ↓ 5°	LCD 30° ↑ 25° / ↓ 5°	LCD 30° ↑ 25° / ↓ 5°	LCD 30° ↑ 25° / ↓ 5°
Pan	360°	360°	360°	360°
Rotation	90° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation	90° Portrait to landscape screen rotation	360° Portrait to landscape screen rotation
VESA	MIS-D	MIS-D	MIS-D	MIS-D
Depth	Folds to 8" (20,3 cm)	Folds to 12" (30,5 cm)	Folds to 8" (20,3 cm)	Folds to 12" (30,5 cm)
Extension	≤ 43" (109 cm) with Extender ≤ 60" (152 cm)	≤ 39.75" (101 cm) with Extender ≤ 56.75" (144 cm)	≤ 43" (109 cm) with Extender ≤ 60" (152 cm)	≤ 39.75" (101 cm) with Extender ≤ 56.75" (144 cm)
Warranty	5 years	5 years	5 years	5 years



StyleView Sit-Stand Combo System
with Worksurface and Extender Arm folds to 8" (20,3 cm)





See how you will benefit from our years of digital display mounting and mobility innovation in healthcare environments.
healthcare.ergotron.com



Smart point-of-care mounting and mobility solutions for your entire facility


Implement cost effective solutions while maintaining the highest standards of quality patient point-of-care. Ergotron is committed to manufacturing mount and mobility products packed with the features you need, helping you make the most of your EMR software and systems investments.



StyleView Vertical Lift Patient Room **StyleView Vertical Lift High Traffic Areas** **Vertical Lift Auto-Retracting Keyboard Kit**

Part # (color)	60-609-216 (white) 60-609-195 (black), available Americas	60-593-216 (white), available Americas 60-593-195 (black), available Americas	97-487-800 (black/white/grey), available Americas Vertical Lift High Traffic models only
Includes	Vertical Lift, slide out panning keyboard tray, mouse pad (built into keyboard tray) wrist rest, mouse pouch, mouse and scanner holder	Vertical Lift, mouse pad, wrist rest, mouse pouch	Keyboard tray lift assembly, wrist rest, multiple covers (grey, black, white), Velcro and adhesive strips
Optional Accessories: Vertical CPU Holder 97-468-202 (silver); Vertical Small CPU Holder 80-063-200 (black)			
Typical LCD Size	≤ 24"	≤ 24"	—
<small>LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.</small>			
Weight Capacity	8–33 lbs (3,6–14,3 kg)	5–30 lbs (2,3–13,6 kg)	.75–2.5 lbs (0,34–1,13 kg)
Lift	9" (23 cm)	9" (23 cm)	—
Tilt	LCD 10° Back-tilt keyboard tray 10°	LCD 10° Back-tilt keyboard tray 10°	—
Pan	50° Display size may restrict motion Keyboard 120°	—	—
Rotation	—	—	—
VESA	MIS-D	MIS-D	—
Depth	Folds to 4.5" (11,4 cm)	Folds to 4" (10,2 cm)	—
Extension	18.8" (47,9 cm)	12" (30,5 cm)	—
Warranty	5 years	5 years	5 years





Monitor & Handle Kit (black)
97-760-009
Dual Monitor & Handle Kit
(black) 97-718-009



Interactive Arm LD

Interactive Arm HD

Interactive Arm VHD

Glide Wall Mount HD

Part # (color)	45-361-026 (polished aluminum)	45-296-026 (polished aluminum)	45-304-026 (polished aluminum)	61-061-085 (black)
Typical LCD Size	≤ 42"	30-60"	30-60+"	30-60"
LCD SIZE IS APPROXIMATION. DIMENSION IS DIAGONAL MEASUREMENT OF SCREEN. LCD SIZE MAY BE EXCEEDED AS LONG AS SCREEN WEIGHT DOES NOT EXCEED MAXIMUM WEIGHT CAPACITY OF THE MOUNT.				
Weight Capacity	7-25 lbs (3,2-11,3 kg)	18-40 lbs (8,2-18,2 kg)	35-70 lbs (15,9-31,8 kg)	20-40 lbs (9-18 kg)
Lift	20" (51 cm)	20" (51 cm)	20" (51 cm)	18" (46 cm)
Tilt	75° ↑ 70° / ↓ 5°	25° ↑ 10° / ↓ 15°	20° ↑ 5° / ↓ 15°	10°
Pan	180°	180°	180°	—
Rotation	360°	10° ← 5° / → 5°	10° ← 5° / → 5°	—
VESA	75 x 75, 100 x 100, 200 x 100, 200 x 200 mm Optional VESA Bracket Adaptor Kit (97-759) can be ordered separately for MIS-F interface with hole pattern of 400 x 200, 400 x 300 or 400 x 400 mm	200 x 100 - 600 x 400 mm	200 x 100 - 600 x 400 mm	200 x 100 - 400 x 400 mm
Depth	4.5" (11 cm)	5.5" (14 cm)	6.5" (16,5 cm)	2" (5 cm)
Extension	17" (43 cm)	24" (61 cm)	28" (71 cm)	—
Warranty	5 years	5 years	5 years	5 years

PowerShuttle® (PS) Laptop Cart: Charges. Manages. Compact, secure and cost-effective design.

Buying the right laptops is only one piece of the puzzle. Securely storing, deploying and managing those important assets while making it easy for staff is equally important. This cart's universal interface charges and manages software on up to 20 devices (works with laptops, netbooks and tablets). Patent-pending PowerShuttle Load Sensing Technology optimizes total charge time while safely preventing electrical circuit overload by efficiently grouping the number of devices that are charged at one time. Works in any environment, including education, healthcare and enterprise applications.

Universal design

- Open-architecture design works with laptops, netbooks and tablets with displays up to 15.6"
- Country-specific power strip is provided to plug in 20 AC adapters. Unique, flexible design accommodates a variety of brick and plug styles for laptops, netbooks and tablets that won't fit in standard outlet strips

PowerShuttle Technology

- Efficiently scans the system and distributes power to optimize total charge time for the laptops and prevent overloading electrical circuits at the same time

Durable, secure storage

- Robust key and lock assembly keeps devices secure. Double-hinged, locking steel front doors with recessed handle open 180° to reveal notebook storage shelves
- Rugged steel frame construction, steel front and rear doors, and molded fire-rated ABS exterior withstands heavy use of classroom settings
- For user and equipment safety, the entire cart is tested and certified to UL 60950 and 1667 standards

Easy to use

- Lightweight, up to 49% smaller than competitive product, this compact cart design makes it easy to safely move from room to room
- Ships fully assembled




PowerShuttle® (PS) Tablet Charging Cart, AC

This cart's universal interface charges up to 30 tablets and Ultrabooks™ using the products' AC adapters. Patent-pending PowerShuttle Technology optimizes total charge time while safely preventing electrical circuit overload by efficiently grouping the number of devices that are charged at one time. Works in any environment, including education, healthcare and enterprise applications.



Certification
UL 60950 Safety of Information Technology Equipment, CAN/CSA C22 2 No. 60950
UL 1667 Tall Institutional Carts for use with Audio, Video and Television Type Equipment
ICES-003 Issue 4, Class A
FCC Part 15 Class A
Country-specific certification as required
RoHS and Reach compliant material used

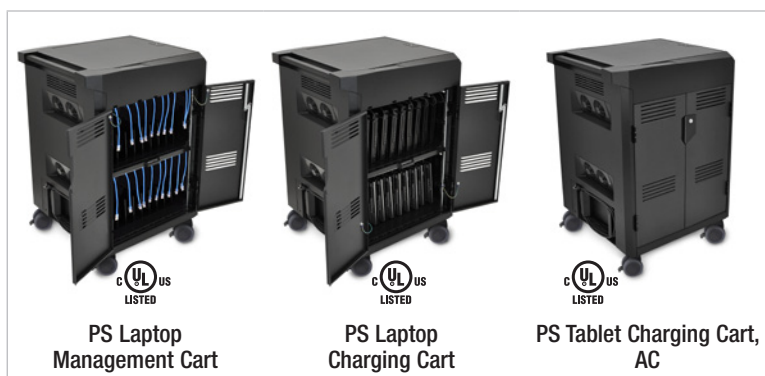

Part # (color)	Includes	Typical LCD Size	Weight Capacity	Warranty
(black) US/Canada/Mexico 24-246-085 China 24-247-085 Japan 24-248-085 UK/SNG/HK 24-249-085 EU 24-250-085 AU/NZ 24-251-085	20 device slots, 12.5' (3,8 m) power cable, country-specific power strip, cable management tray, four 4" (10 cm) medical-grade locking casters, 20 CAT 6 Ethernet cables, standard 1U Ethernet switch mounting brackets, auxiliary outlet (external), auxiliary outlet (internal for switch and WAP), integrated handle	Maximum device size: 15.1"W x 11.0"D x 1.69"H (38,4 x 28 x 4,3 cm)	Maximum device weight: 6.5 lbs (2,9 kg)	Five (5) years; two (2) years for power module; one (1) year for other electrical components
(black) US/Canada/Mexico 24-291-085 China 24-292-085 Japan 24-293-085 UK/SNG/HK 24-294-085 EU 24-295-085 AU/NZ 24-296-085	20 device slots, 12.5' (3,8 m) power cable, country-specific power strip, cable management tray, four 4" (10 cm) medical-grade locking casters, integrated handle	Maximum device size: 15.1"W x 11.0"D x 1.69"H (38,4 x 28 x 4,3 cm)	Maximum device weight: 6.5 lbs (2,9 kg)	Five (5) years; two (2) years for power module; one (1) year for other electrical components
(black) US/Canada/Mexico 24-302-085 China 24-305-085 Japan 24-306-085 UK/SNG/HK 24-303-085 EU 24-304-085 AU/NZ 24-307-085	30 device slots, 12.5' (3,8 m) power cable, country-specific power strip, cable management tray, four 4" (10 cm) medical-grade locking casters, integrated handle	Maximum device size: 12.8"W x 11.4"H x 1.0"D (32,5 x 29 x 2,54 cm)	Maximum device weight: ≤ 3.3 lbs (1,5 kg)	Five (5) years; two (2) years for power module; one (1) year for other electrical components

Sync and charge Apple® devices. Lightweight, compact, easy to maneuver, secure and cost-effective design.

Super Compact Design

- Up to 40% smaller and lighter (unloaded) than competitive product
- Charge and sync up to 48 Apple iPad®, iPod®, and iPhone® devices.
- Compatible with both 30-pin and Lightning™ connector cables
- Optional LED Individual Status Indicators (ISI) monitor charging progress of each tablet

Secure Storage

- Steel tube and aluminum extrusion framework; steel access doors
- Durable steel doors with three-point lock and assembly provide strong theft deterrence
- Optional Security Bracket accessory kit (97-735) provides ability to lock cart to floor or wall bracket for extra security when needed

Certified for Safety

- Tested and certified to UL 60950-1 and UL 1667 standards, FCC requirements and all applicable country-specific regulations

Up to **40%** smaller and lighter than competitive offerings




USB Cable Kit 97-766
These certified USB cables for iPad (30-pin, set of 16 cables) are a custom length to fit perfectly inside Ergotron Tablet Management products



Save time and money by allowing our experts to integrate your Ergotron Tablet Management product with certified cables (see chart)



Security Bracket Accessory Kit 97-735



See "Tablet Management: Sync & Take Charge" movies.ergotron.com



Tablet Management Cart 48



Tablet Management Cart 32



Tablet Management Desktop 16

For iPad		(black) US/Canada/Mexico 24-329-085 UK/SING/HK 24-335-085 EU 24-341-085 AU 24-347-085 China 24-353-085 Japan 24-359-085		(black) US/Canada/Mexico 24-374-085 UK 24-377-085 EU 24-380-085		(black) US/Canada/Mexico 24-328-085 UK/SING/HK 24-334-085 EU 24-340-085 AU 24-346-085 China 24-352-085 Japan 24-358-085		(black) US/Canada/Mexico 24-373-085 UK 24-376-085 EU 24-379-085		(black) US/Canada/Mexico 24-327-085 UK/SING/HK 24-333-085 EU 24-339-085 AU 24-345-085 China 24-351-085 Japan 24-357-085		(black) US/Canada/Mexico 24-372-085 UK 24-375-085 EU 24-378-085	
30-pin Cable Options		Use 3 certified USB Cable Kits (97-766) or cables that come with device		Use 2 certified USB Cable Kits (97-766) or cables that come with device		Use 1 certified USB Cable Kit (97-766) or cables that come with device							
Lightning Cable Options		Use cables that come with device		Use cables that come with device		Use cables that come with device							
Onsite Professional Cable Integration		Product Integration Tier 2 (10+ units) US/Canada/APAC w/o China SRVC-PI-02 China SRVC-PI-02 EMEA SRVCE-PI-02 Single Product Integration US only SRVC-SPI-01		Product Integration Tier 2 (10+ units) US/Canada/APAC w/o China SRVC-PI-02 China SRVC-PI-02 EMEA SRVCE-PI-02 Single Product Integration US only SRVC-SPI-01		Product Integration Tier 1 (15+ units) US/Canada/APAC w/o China SRVC-PI-01 China SRVC-PI-01 EMEA SRVCE-PI-01 Single Product Integration US only SRVC-SPI-01							
ISI (Individual Status Indicators)		Yes	No	Yes	No	Yes	No	Yes	No	Yes	No	Yes	No
Sync		Yes, USB or wireless		Yes, USB or wireless		Yes, USB or wireless							
Charge		Yes, 2.1A via USB		Yes, 2.1A via USB		Yes, 2.1A via USB							
Recommended Devices (most cases fit)		iPad mini iPad (4th generation) iPad (3rd generation) iPad 2 iPod touch (5th generation) iPod touch (4th generation) iPod touch (3rd generation)		iPad mini iPad (4th generation) iPad (3rd generation) iPad 2 iPod touch (5th generation) iPod touch (4th generation) iPod touch (3rd generation)		iPad mini iPad (4th generation) iPad (3rd generation) iPad 2 iPod touch (5th generation) iPod touch (4th generation) iPod touch (3rd generation)							
# of Devices		48		32		16							
UL Certification		Yes		Yes		Yes							
Slot Size		7.9"H x 11.3"W x 0.85"D (20 x 28,8 x 2,2 cm)		7.9"H x 11.3"W x 0.85"D (20 x 28,8 x 2,2 cm)		7.9"H x 11.3"W x 0.85"D (20 x 28,8 x 2,2 cm)							
Product Dimension		23"W x 18.4"D x 39.3"H (58,4 x 46,7 x 100 cm)		23"W x 18.4"D x 39.3"H (58,4 x 46,7 x 100 cm)		18.3"W x 16.2"D x 10.4"H (46,5 x 41,1 x 26,4 cm)							
Product Weight (unloaded)		125 lbs (56,7 kg)		99 lbs (44,9 kg)		29 lbs (13,2 kg)							
Warranty		5 year warranty; 1 year warranty on all non-power supply electronic systems; 2 year warranty on all power modules											

"Made for iPod," "Made for iPhone," and "Made for iPad" mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

iPad, iPhone, iPod, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. Lightning is a trademark of Apple Inc.

Ready. Set. Charge.



Safe & Secure

- Tested and certified to UL 60950-1 standards, FCC requirements and all applicable country-specific regulations
- Six-point lock assembly provides strong theft deterrence; includes security screws to attach product to the wall
- Fan and ventilation system maintains safe operating temperature
- Ergotron not only uses UL-certified components, but goes a step further to have UL certify the entire system to guarantee safe use within the classroom, healthcare, or enterprise setting

Top-rated Sync & Charge

- Built-in syncing capability; simultaneously sync up to 10 devices by connecting your laptop via the cabinet's USB port
- Full 2.1A charge capability

Slim & Open Design


- Fits most anywhere: very low profile – only 4" (10 cm) deep, even with access doors
- Accommodates most iPad cases – including the popular Otterbox Defender™ and Griffin Survivor™

Easy Set-up & Operation

- Choose pre-installed 30-pin or pre-installed Lightning™ cable option
- Quick, simple installation includes mounting template
- Patent-pending Show & Stow™ technology extends iPad devices to the user when the door is opened for easy storage and removal
- Easy to clean, sleek and smart design hides device and cord clutter
- Clear ISI (Individual Status Indicator) LEDs provide power and charging status of each individual device at a glance



	For iPad	For Lightning iPad
Part # (color)	(silver/black) US/Canada/Mexico DM10-1001-1 EU DM10-1001-2 UK/SING/HK DM10-1001-3 AU/NZ DM10-1001-4 China DM10-1001-5 Japan DM10-1001-6	(silver/black) US/Canada/Mexico DM10-1002-1 EU DM10-1002-2 UK/SING/HK DM10-1002-3 AU/NZ DM10-1002-4 China DM10-1002-5 Japan DM10-1002-6
Includes	Tablet Management Wall Mount unit, 6 foot power cord, 10 charging cables (30-pin or Lightning option), external USB 2.0B port for connecting laptop, power cord cover, 2 wall mount brackets and associated hardware for installation on wood stud or concrete walls, installation template, security allen wrench, 90 degree Phillips wrench	
Cables	30-pin	Lightning
Charge	2.1A	2.1A
Compatible Devices (most cases fit)	iPhone 4S iPhone 3GS iPod touch (4th generation) iPod touch (3rd generation) iPad (3rd generation) iPad 2 iPad	iPhone 5 iPod touch (5th generation) iPad mini iPad (4th generation)
UL Certification	Yes	Yes
Maximum Dimensions Individual Tablet (including cover)	≤ 10.2"H x 7.9"W x 0.9"D (25,9 x 20,1 x 2,3 cm)	≤ 10.2"H x 7.9"W x 0.9"D (25,9 x 20,1 x 2,3 cm)
Weight Capacity	24 lbs (11 kg) 2.4 lbs (1,1 kg) per device	24 lbs (11 kg) 2.4 lbs (1,1 kg) per device
Shipping Dimensions	36.5" x 26.4" x 7.0" (92,6 x 67 x 17,7 cm)	36.5" x 26.4" x 7.0" (92,6 x 67 x 17,7 cm)
Shipping Weight	39.5 lb (17,9 kg)	39.5 lb (17,9 kg)
Warranty	Five (5) years workmanship/mechanical components, two (2) years on power module, one (1) year on electrical components	



Your cart. Your way.

Nurses, meet your new StyleView®

Personalize your cart to suit your team's workstyle and flow. That's the genius behind our 5th generation StyleView medical carts.

We've been listening. You'll find all the great features that have made StyleView a market leader, plus new design advancements. Now you have the broadest options to create a comfortable, fully adjustable med cart – one that supports you and the care you give.



styleview.ergotron.com

The leader in point-of-care digital mounting and mobility

Use the Cart Finder tool
on ergotron.com
to find your perfect cart



+ Display mount: LCD Arm, LCD Pivot, Laptop



+ Power: Lithium Iron Phosphate (LiFe), Sealed Lead Acid (SLA), Non-powered




+ Drawers: order carts fully-configured OR upgrade with drawers as needs change



+ Accessories: new Storage Bin and Envelope Drawer





Non-Powered Carts








Laptop		LCD	
			
SV40 Laptop	Laptop	LCD Arm	LCD Pivot
			
1 Drawer	2 Drawers	4 Drawers (LCD Arm)	6 Drawers (LCD Pivot)




Twenty years in healthcare
back up this industry-leading
portfolio of scalable carts.
healthcare.ergotron.com

Non-Powered Carts

SV40 Laptop	Laptop	LCD Arm	LCD Pivot	Laptop 1 Drawer	Laptop 2 Drawers	Laptop 4 Drawers	Laptop 6 Drawers	
SV40-6100-0	SV41-6100-0	SV41-6200-0	SV41-6300-0	SV41-3110-0	SV41-3120-0	SV41-3140-0	SV41-3160-0	
LCD Arm 1 Drawer	LCD Arm 2 Drawers	LCD Arm 4 Drawers	LCD Arm 6 Drawers	LCD Pivot 1 Drawer	LCD Pivot 2 Drawers	LCD Pivot 4 Drawers	LCD Pivot 6 Drawers	SV40 LCD Pivot
SV41-3210-0	SV41-3220-0	SV41-3240-0	SV41-3260-0	SV41-3310-0	SV41-3320-0	SV41-3340-0	SV41-3360-0	SV40-6300-0

		 Typical Size	 Weight Capacity	 Lift	 Tilt	 Pan	 Rotation	 VESA
Non-Powered	LCD	≤ 22"	See website	Arm 27" (68,6 cm) Lift Pivot 25" (63,5 cm)	Arm 65° Lift Pivot 25°	Arm 180° Lift Pivot 24°	Arm 360° P/L Lift Pivot 90° P/L	MIS-D
		Includes secure CPU compartment						
	Laptop	≤ 17"	See website	20" (51 cm)	—	—	—	—
SV40-40004 does not include Ethernet ready-on function and four-port USB hub, rear handle, storage basket								
Non-powered Cart features includes worksurface, secure compartment, four-port USB hub, scanner holder bracket, mouse holder, wrist rest, back-tilt keyboard tray, left/right mouse tray, rear handle, storage basket, cable storage, four casters (two locking)								
5-year warranty								
See website for details								

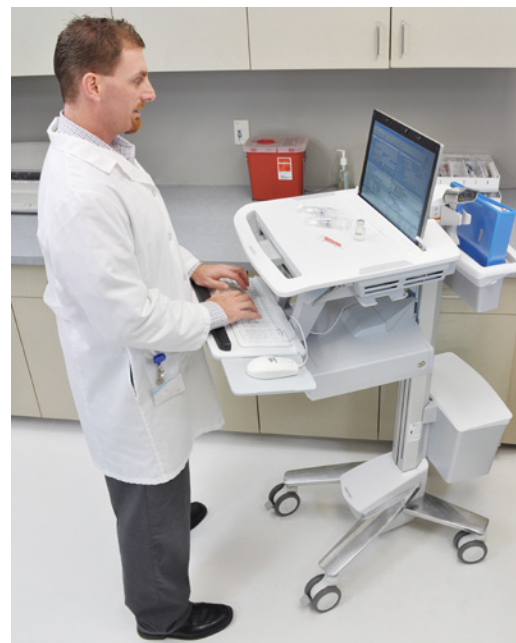

Attractive, lightweight and ergonomic, these carts meet the individual needs of the caregiver while supporting the application-specific needs of point-of-care.




Improved workflow for nurses

Non-Powered Accessories

Primary Drawer, SV41 LCD single	97-725
Primary Drawer, SV41 Laptop single	97-727
Primary Drawer, SV41 LCD triple	97-726
Primary Drawer, SV41 Laptop triple	97-728
Supplemental Drawer, SV41 single	97-730
Supplemental Drawer, SV41 triple	97-729
Envelope Drawer, SV41	97-731



Enterprise Management: **FREE** StyleLink Software secures access to drawers and allows remote monitoring/configuration with established Microsoft tools



Superior ergonomics and maneuverability for the largest range of nurses

Powered Carts

Laptop		LCD	
	Laptop		LCD Pivot
	1 Drawer		4 Drawers (LCD Arm)
	2 Drawers		6 Drawers (LCD Pivot)

EXPERIENCE the difference with our Global Service Program

Visit Ergotron.com for details about all of our service options



Ergotron's Platinum Annual Service Contract ensures timely and safe service delivery across all Ergotron product lines.

Powered Accessories

Primary Drawer, SV42 LCD single	97-715
Primary Drawer, SV42 Laptop single	97-720
Primary Drawer, SV42, LCD triple	97-719
Primary Drawer, SV42 Laptop triple	97-721
Supplemental Drawer, SV42 single	97-716
Supplemental Drawer, SV42 triple	97-722
Storage Drawer	97-723
Envelope Drawer, SV42	97-724
Storage Bin	97-740

Certified. Lightweight.
Ultrafast recharge.
Long battery LiFe.



Why choose a StyleView Cart powered with Lithium Iron Phosphate (LiFe)?

Extremely lightweight and adjustable

The LiFe power system and compact, lightweight base combine with StyleView's ergonomic adjustability to decrease caregiver fatigue and enhance overall wellness and productivity

Ultrafast recharge ensures caregiver and cart uptime

A full recharge from full discharge can be completed in around two hours for typical loads. Less charging = more caregiving!

Long battery 'LiFe' minimizes time and cost for maintenance and replacement

Proven to achieve thousands of cycles per lifetime and to last several years in a typical healthcare setting

Safe and certified

For patient and caregiver safety, the FULL cart and power system are certified to UL 60601-1

Includes FREE StyleLink with enterprise capabilities

Install, access and manage your StyleView power systems from a remote location across WAN, LAN, or VPN

Proven safe battery chemistry

Through extensive testing, Lithium Iron Phosphate is proven to be a very safe battery chemistry



Compliant with EN 60601-1



Powered Carts

	Laptop	LCD Arm	LCD Pivot	Laptop 1 Drawer	Laptop 2 Drawers	Laptop 4 Drawers	Laptop 6 Drawers	LCD Arm 1 Drawer
LiFe US/Canada	SV42-6102-1 120V60Hz	SV42-6202-1 120V60Hz	SV42-6302-1 120V60Hz	SV42-3112-1 120V60Hz	SV42-3122-1 120V60Hz	SV42-3142-1 120V60Hz	SV42-3162-1 120V60Hz	SV42-3212-1 120V60Hz
SLA US/Canada	SV42-6101-1 120V60Hz	SV42-6201-1 120V60Hz	SV42-6301-1 120V60Hz	SV42-3111-1 120V60Hz	SV42-3121-1 120V60Hz	SV42-3141-1 120V60Hz	SV42-3161-1 120V60Hz	SV42-3211-1 120V60Hz
LiFe Europe	SV42-6102-2 230V50/60Hz	SV42-6202-2 230V50/60Hz	SV42-6302-2 230V50/60Hz	SV42-3112-2 230V50/60Hz	SV42-3122-2 230V50/60Hz	SV42-3142-2 230V50/60Hz	SV42-3162-2 230V50/60Hz	SV42-3212-2 230V50/60Hz
SLA Europe	SV42-6101-2 230V50Hz	SV42-6201-2 230V50Hz	SV42-6301-2 230V50Hz	SV42-3111-2 230V50Hz	SV42-3121-2 230V50Hz	SV42-3141-2 230V50Hz	SV42-3161-2 230V50Hz	SV42-3211-2 230V50Hz
LiFe Ireland/United Kingdom	SV42-6102-3 230V50/60Hz	SV42-6202-3 230V50/60Hz	SV42-6302-3 230V50/60Hz	SV42-3112-3 230V50/60Hz	SV42-3122-3 230V50/60Hz	SV42-3142-3 230V50/60Hz	SV42-3162-3 230V50/60Hz	SV42-3212-3 230V50/60Hz
SLA Ireland/United Kingdom	SV42-6101-3 230V50Hz	SV42-6201-3 230V50Hz	SV42-6301-3 230V50Hz	SV42-3111-3 230V50Hz	SV42-3121-3 230V50Hz	SV42-3141-3 230V50Hz	SV42-3161-3 230V50Hz	SV42-3211-3 230V50Hz
LiFe Hong Kong/Malaysia/Singapore	SV42-6102-3 230V50/60Hz	SV42-6202-3 230V50/60Hz	SV42-6302-3 230V50/60Hz	SV42-3112-3 230V50/60Hz	SV42-3122-3 230V50/60Hz	SV42-3142-3 230V50/60Hz	SV42-3162-3 230V50/60Hz	SV42-3212-3 230V50/60Hz
SLA Hong Kong/Malaysia/Singapore	SV42-6101-3 230V50Hz	SV42-6201-3 230V50Hz	SV42-6301-3 230V50Hz	SV42-3111-3 230V50Hz	SV42-3121-3 230V50Hz	SV42-3141-3 230V50Hz	SV42-3161-3 230V50Hz	SV42-3211-3 230V50Hz
LiFe China	SV42-6102-5 220V50Hz	SV42-6202-5 220V50Hz	SV42-6302-5 220V50Hz	SV42-3112-5 220V50Hz	SV42-3122-5 220V50Hz	SV42-3142-5 220V50Hz	SV42-3162-5 220V50Hz	SV42-3212-5 220V50Hz
SLA China	SV42-6101-5 220V50Hz	SV42-6201-5 220V50Hz	SV42-6301-5 220V50Hz	SV42-3111-5 220V50Hz	SV42-3121-5 220V50Hz	SV42-3141-5 220V50Hz	SV42-3161-5 220V50Hz	SV42-3211-5 220V50Hz
LiFe Australia/New Zealand	SV42-6102-4 230V50Hz	SV42-6202-4 230V50Hz	SV42-6302-4 230V50Hz	SV42-3112-4 230V50Hz	SV42-3122-4 230V50Hz	SV42-3142-4 230V50Hz	SV42-3162-4 230V50Hz	SV42-3212-4 230V50Hz
SLA Australia/New Zealand	SV42-6101-4 230V50Hz	SV42-6201-4 230V50Hz	SV42-6301-4 230V50Hz	SV42-3111-4 230V50Hz	SV42-3121-4 230V50Hz	SV42-3141-4 230V50Hz	SV42-3161-4 230V50Hz	SV42-3211-4 230V50Hz
SLA Japan	SV42-6101-6 100V50Hz	SV42-6201-6 100V50Hz	SV42-6301-6 100V50Hz	SV42-3111-6 100V50Hz	SV42-3121-6 100V50Hz	SV42-3141-6 100V50Hz	SV42-3161-6 100V50Hz	SV42-3211-6 100V50Hz
LiFe Saudi Arabia/EU	SV42-6102-2 230V50/60Hz	SV42-6202-2 230V50/60Hz	SV42-6302-2 230V50/60Hz	SV42-3112-2 230V50/60Hz	SV42-3122-2 230V50/60Hz	SV42-3142-2 230V50/60Hz	SV42-3162-2 230V50/60Hz	SV42-3212-2 230V50/60Hz
SLA Saudi Arabia/EU	SV42-6101-8 220V60Hz	SV42-6201-8 220V60Hz	SV42-6301-8 220V60Hz	SV42-3111-8 220V60Hz	SV42-3121-8 220V60Hz	SV42-3141-8 220V60Hz	SV42-3161-8 220V60Hz	SV42-3211-8 220V60Hz
LiFe Saudi Arabia/UK	SV42-6102-3 230V50/60Hz	SV42-6202-3 230V50/60Hz	SV42-6302-3 230V50/60Hz	SV42-3112-3 230V50/60Hz	SV42-3122-3 230V50/60Hz	SV42-3142-3 230V50/60Hz	SV42-3162-3 230V50/60Hz	SV42-3212-3 230V50/60Hz
SLA Saudi Arabia/UK	SV42-6101-7 220V60Hz	SV42-6201-7 220V60Hz	SV42-6301-7 220V60Hz	SV42-3111-7 220V60Hz	SV42-3121-7 220V60Hz	SV42-3141-7 220V60Hz	SV42-3161-7 220V60Hz	SV42-3211-7 220V60Hz



Task Light Accessory
97-754-002

	Typical Size	Weight Capacity	Lift	Tilt	Pan	Rotation	VESA
Life Powered	≤ 22"	See website	Arm 27" (68.6 cm) Lift Pivot 25" (63.5 cm)	Arm 65° Lift Pivot 25°	Arm 180° Lift Pivot 24°	Arm 360° P/L Lift Pivot 90° P/L	MIS-D
	Includes one-battery 40 Ah power system, 10-foot coiled cord, two hospital-grade AC outlets, power system user interface, StyleLink™ software, secure CPU compartment						
Laptop	≤ 17"	See website	20" (51 cm)	—	—	—	—
	Includes one-battery 40 Ah power system, 10-foot coiled cord, two hospital-grade AC outlets, power system user interface, StyleLink™ software, secure laptop compartment						
Life Cart features include worksurface, four-port USB hub, scanner holder bracket, mouse holder, wrist rest, back-tilt keyboard tray, left/right mouse tray, rear handle, storage basket, cable storage, four casters (two locking)							
Warranty: 5 years for cart, 2 years on all power supply components; 5 years on Life battery, including 2-year capacity guarantee							

	Typical Size	Weight Capacity	Lift	Tilt	Pan	Rotation	VESA
SLA Powered	≤ 22"	See website	Arm 27" (68.6 cm) Lift Pivot 25" (63.5 cm)	Arm 65° Lift Pivot 25°	Arm 180° Lift Pivot 24°	Arm 360° P/L Lift Pivot 90° P/L	MIS-D
	Includes two-battery 66 Ah power system, 10-foot coiled cord, four hospital-grade AC outlets, power system user interface, StyleLink™ software, secure CPU compartment						
Laptop	≤ 17"	See website	20" (51 cm)	—	—	—	—
	Includes two-battery 66 Ah power system, 10-foot coiled cord, four hospital-grade AC outlets, power system user interface, StyleLink™ software, secure laptop compartment						
SLA Cart features include worksurface, four-port USB hub, scanner holder bracket, mouse holder, wrist rest, back-tilt keyboard tray, left/right mouse tray, rear handle, storage basket, cable storage, four casters (two locking)							
5-year warranty, excluding electrical/electronic components							

	Certification Standard	Certification Mark	Grounded Plug & Outlet
US	UL 60601-1	cTÜVus	North American NEMA 5-15P Hospital Grade
Canada	CAN/CSA C22.2 No. 601.1 M90	cTÜVus	North American NEMA 5-15P Hospital Grade
Mexico	As Needed	As Needed	North American NEMA 5-15P Hospital Grade
Europe	EN 60601-1	CE	European CEE 7
Ireland/ United Kingdom	EN 60601-1	CE	United Kingdom BS 1363
Hong Kong/ Malaysia/Singapore	IEC 60601-1	Not Applicable	United Kingdom BS 1363
China	IEC 60601-1	Not Applicable	GB2009-1 GB1002-1
Australia/ New Zealand	IEC 60601-1	C-Tick	Australian AS/NZS 3112
Japan	IEC 60601-1	Not Applicable	JIS 8303
Saudi Arabia (EMR SLA)	EN 60601-1	Not Applicable	United Kingdom BS 1363 / European CEE 7

Add more storage as needed



LCD Arm 2 Drawers	LCD Arm 4 Drawers	LCD Arm 6 Drawers	LCD Pivot 1 Drawer	LCD Pivot 2 Drawers	LCD Pivot 4 Drawers	LCD Pivot 6 Drawers
SV42-3222-1 120V60Hz	SV42-3242-1 120V60Hz	SV42-3262-1 120V60Hz	SV42-3312-1 120V60Hz	SV42-3322-1 120V60Hz	SV42-3342-1 120V60Hz	SV42-3362-1 120V60Hz
SV42-3221-1 120V60Hz	SV42-3241-1 120V60Hz	SV42-3261-1 120V60Hz	SV42-3311-1 120V60Hz	SV42-3321-1 120V60Hz	SV42-3341-1 120V60Hz	SV42-3361-1 120V60Hz
SV42-3222-2 230V50/60Hz	SV42-3242-2 230V50/60Hz	SV42-3262-2 230V50/60Hz	SV42-3312-2 230V50/60Hz	SV42-3322-2 230V50/60Hz	SV42-3342-2 230V50/60Hz	SV42-3362-2 230V50/60Hz
SV42-3221-2 230V50Hz	SV42-3241-2 230V50Hz	SV42-3261-2 230V50Hz	SV42-3311-2 230V50Hz	SV42-3321-2 230V50Hz	SV42-3341-2 230V50Hz	SV42-3361-2 230V50Hz
SV42-3222-3 230V50/60Hz	SV42-3242-3 230V50/60Hz	SV42-3262-3 230V50/60Hz	SV42-3312-3 230V50/60Hz	SV42-3322-3 230V50/60Hz	SV42-3342-3 230V50/60Hz	SV42-3362-3 230V50/60Hz
SV42-3221-3 230V50Hz	SV42-3241-3 230V50Hz	SV42-3261-3 230V50Hz	SV42-3311-3 230V50Hz	SV42-3321-3 230V50Hz	SV42-3341-3 230V50Hz	SV42-3361-3 230V50Hz
SV42-3222-3 230V50/60Hz	SV42-3242-3 230V50/60Hz	SV42-3262-3 230V50/60Hz	SV42-3312-3 230V50/60Hz	SV42-3322-3 230V50/60Hz	SV42-3342-3 230V50/60Hz	SV42-3362-3 230V50/60Hz
SV42-3221-3 230V50Hz	SV42-3241-3 230V50Hz	SV42-3261-3 230V50Hz	SV42-3311-3 230V50Hz	SV42-3321-3 230V50Hz	SV42-3341-3 230V50Hz	SV42-3361-3 230V50Hz
SV42-3222-5 220V50Hz	SV42-3242-5 220V50Hz	SV42-3262-5 220V50Hz	SV42-3312-5 220V50Hz	SV42-3322-5 220V50Hz	SV42-3342-5 220V50Hz	SV42-3362-5 220V50Hz
SV42-3221-5 220V50Hz	SV42-3241-5 220V50Hz	SV42-3261-5 220V50Hz	SV42-3311-5 220V50Hz	SV42-3321-5 220V50Hz	SV42-3341-5 220V50Hz	SV42-3361-5 220V50Hz
SV42-3222-4 230V50Hz	SV42-3242-4 230V50Hz	SV42-3262-4 230V50Hz	SV42-3312-4 230V50Hz	SV42-3322-4 230V50Hz	SV42-3342-4 230V50Hz	SV42-3362-4 230V50Hz
SV42-3221-4 230V50Hz	SV42-3241-4 230V50Hz	SV42-3261-4 230V50Hz	SV42-3311-4 230V50Hz	SV42-3321-4 230V50Hz	SV42-3341-4 230V50Hz	SV42-3361-4 230V50Hz
SV42-3221-6 100V50Hz	SV42-3241-6 100V50Hz	SV42-3261-6 100V50Hz	SV42-3311-6 100V50Hz	SV42-3321-6 100V50Hz	SV42-3341-6 100V50Hz	SV42-3361-6 100V50Hz
SV42-3222-2 230V50/60Hz	SV42-3242-2 230V50/60Hz	SV42-3262-2 230V50/60Hz	SV42-3312-2 230V50/60Hz	SV42-3322-2 230V50/60Hz	SV42-3342-2 230V50/60Hz	SV42-3362-2 230V50/60Hz
SV42-3221-8 220V60Hz	SV42-3241-8 220V60Hz	SV42-3261-8 220V60Hz	SV42-3311-8 220V60Hz	SV42-3321-8 220V60Hz	SV42-3341-8 220V60Hz	SV42-3361-8 220V60Hz
SV42-3222-3 230V50/60Hz	SV42-3242-3 230V50/60Hz	SV42-3262-3 230V50/60Hz	SV42-3312-3 230V50/60Hz	SV42-3322-3 230V50/60Hz	SV42-3342-3 230V50/60Hz	SV42-3362-3 230V50/60Hz
SV42-3221-7 220V60Hz	SV42-3241-7 220V60Hz	SV42-3261-7 220V60Hz	SV42-3311-7 220V60Hz	SV42-3321-7 220V60Hz	SV42-3341-7 220V60Hz	SV42-3361-7 220V60Hz

FREE, industry leading StyleLink Software with enterprise capabilities

StyleLink's three-part software package (Enterprise, Client, Graphing Tool) offers broad system and platform compatibility for global healthcare customers deploying Ergotron StyleView Carts with power.

Extend Asset Life Cycle

Optimizes balance between runtime and cycle life
 Helps prevent deep discharging, which maximizes battery cycle life and minimizes battery replacement cost

Proactive Power System Management

Eliminate surprises through use of diagnostic tools, simplifying power system management and reducing time required to fix problems

Email alerts sent by each cart at different stages of battery life facilitate proactive power system management

Remote configuration: remotely configure or change email alerts, names, passwords and communication thresholds on each cart, or a group of carts, using your MS Network

Reduce Total Cost of Ownership

Reduce costs for maintenance; eliminate need for expensive onsite technical support by leveraging diagnostic capabilities. Simply email StyleLink's history data file to Ergotron Tech Support and they will help troubleshoot power system performance issues

Plan battery replacement based on custom views or email alerts, rather than being surprised by a (higher cost) replacement situation during caregivers' active work hours

Enterprise Capabilities

Remote enterprise monitor: access your carts across WAN, LAN, or VPN to get real-time information

Custom views: view those carts that meet your specific rules, e.g., carts unplugged, carts not connected, carts not reporting in the last 7 days, etc.

Group view: organize your carts into groups and subgroups. Set views for specific areas of your facilities; troubleshoot power system performance issues

Advanced Drawer Management

Each drawer individually controlled with PIN; program locally or remotely via enterprise

Drawer event log and report capability

Two points of console access for PIN updates: Unit Clerk or IT



Get real-time centralized control over mobile computing deployments across multi-facility healthcare campuses.

Dynamic Icon

- Green/Yellow/Red
- Corresponds to Charge Remaining

Time Remaining

- Hours, Minutes
- No Load
- Charging

Charge Remaining

- 0-100%
- Color Coded to Match RUI

Percent Load

- 0-100%
- Color Coded to Show Preferred Load Range

Power Source

- Line Mode
- Battery Mode
- Not Connected

System Metrics In Real Time

Battery

- Good
- Replace
- Unknown

System Fault

- No Fault
- Temperature High
- Not Connected

Drawer

- Normal
- Illegal Drawer Opening
- Drawer Fault

System Metric	Value
Time Remaining	Charging
Charge Remaining	100%
Load	9%
Battery Voltage	13.8 VDC
Input Voltage	117.0 VAC
Charge Current	10.0 DCA
System Temperature	86 °F
Power Source	Line
Battery	Good
System Status	Normal
Drawer	Normal

Accessorize your StyleView cart to suit your workflow

Ergotron accessories extend the flexibility of your StyleView mobility solution, helping maintain the highest quality patient point-of-care wherever that occurs within your workflow.

Explore all your options at styleview.ergotron.com



SV Cart LCD Pan Pivot Kit
97-650



SV Dual Display Kit
97-574




Utility Shelf
97-507-216



Large Utility Shelf
97-540-053



Universal Tablet Cradle
80-106-085



StyleView IV Pole Clamp Kit
97-632



SV Rear VESA Mount Kit
97-512-009



T-Slot Bracket
60-575-003



Primary Drawer – Single
SV41 LCD **97-725**
SV42 LCD **97-715**
SV41 Laptop **97-727**
SV42 Laptop **97-720**
Storage **97-794**



Primary Drawer – Triple
SV41 LCD **97-726**
SV42 LCD **97-719**
SV41 Laptop **97-728**
SV42 Laptop **97-721**
Storage **97-795**



Supplemental Drawer – Single
SV41 **97-730**
SV42 **97-716**
Storage **97-723**



Supplemental Drawer – Triple
SV41 **97-729**
SV42 **97-722**
Storage **97-796**



Envelope Drawer
SV41 **97-731**
SV42 **97-724**



Storage Bin
97-740



Task Light
97-754-002



SV T-Nut Kit
97-631



Medical-Grade Power Strip
97-466-214
(Available North America)



Universal CPU Holder
80-105-064



K-Slot Lock Kit
97-702

Accessories in use

*Ergotron sells brackets to attach the open-source products shown below but does not sell the products themselves



SV cart with small Sharps container* and wall mount bracket attached via Ergotron's VESA Mount Kit **97-512-009**



SV cart with large Sharps container* (5 quart) and wall mount bracket attached via Ergotron's VESA Mount Kit **97-512-009**



SV cart with waste basket* (5 quart) and wall mount bracket attached via Ergotron's VESA Mount Kit **97-512-009**



SV cart with medication cup dispenser* adhered to 5" lift




SV cart with scanner/printer* placed on Ergotron's Large Utility Shelf **97-540-053** and attached with the T-Slot Bracket **60-575-003**



SV cart with IV Pole* attached via Ergotron's StyleView IV Pole Clamp Kit





Join the Uprising! Just Stand.

Get inspired!

For those stuck long hours sitting at a computer, standing a little more each day burns extra calories, tones muscles, improves posture, increases blood flow and ramps up metabolism. Find the calculator online at burncalories.juststand.org


Calorie-Burn Calculator

Just standing while doing office work promotes fitness. See the difference in calorie-burn. Over time it adds up!

Enter your weight: lbs

Enter time worked in office: hours

If Standing while working	<input type="text" value="1665"/>	calories burned
If Sitting while working	<input type="text" value="1282"/>	calories burned
Calorie-burn increase	<input type="text" value="383"/>	calories



“My calories burned per day went up by about 400 ... Who would have thought such a simple thing would make such a huge difference?”

~ Clare H., major PC company


The science behind the need to stand:

- A 2011 study published by the U.S. Centers for Disease Control and Prevention (CDC) shows that when workers are equipped with sit-stand workstations, prolonged sitting is reduced and mood states improve.
- An American Cancer Society study, published in the July 2010 American Journal of Epidemiology, of 120,000 adults suggests that the more people sit, the shorter their average life span. What's more, the findings were independent of physical activity level such as with people who exercise outside of work.
- A 2010 University of Queensland, Australia study found that even when adults meet physical activity guidelines, sitting for prolonged periods can compromise metabolic health.

The term “Sitting Disease” has been coined by the scientific community and is commonly used when referring to metabolic syndrome and the ill-effects of an overly sedentary lifestyle. However, the medical community does not recognize Sitting Disease as a diagnosable disease at this time.

Ergotron devices are not intended to cure, treat, mitigate or prevent any disease.


The key to standing more is to assemble a system that matches your body and your work routine.

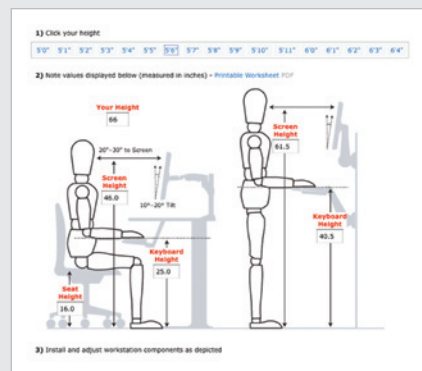

“Sitting Disease” by the numbers

**Our modern sedentary lifestyles,
both at home and in the workplace,
are costly for us and for our employers.**

Average hours of seated commute
+ average hours of seated homelife = too much sitting!



A 2008 Vanderbilt University study of 6,300 people published in the *American Journal of Epidemiology* estimated that the average American spends 55% of waking time (7.7 hours per day) in sedentary behaviors such as sitting.

Ergotron Service Program

Planned Services	US & Canada #	APAC w/o China #	China #	EMEA #	Power	Carts Per Site
Site Readiness Full Day Visit	SRVC-SR-01	SRVC-SR-01	SRVCC-SR-01	SRVCE-SR-01	—	—
Integration	SRVC-PI-01	SRVC-PI-01	SRVCC-PI-01	SRVCE-PI-01	—	15+
	SRVC-PI-02	SRVC-PI-02	SRVCC-PI-02	SRVCE-PI-02	—	10+
	SRVC-PI-03	SRVC-PI-03	SRVCC-PI-03	SRVCE-PI-03	—	10+
Integration Single Product	SRVC-SPI-1 (US only)	—	—	—	Powered & Non-powered	1
Product Recycling Includes Freight	SRVC-RCYL-F	—	—	—	—	10+
Product Recycling Customer Pays Freight	SRVC-RCYL-NF	—	—	—	—	—
StyleLink Remote Analysis StyleView Carts	SRVC-STYLK-01	SRVC-STYLK-01	SRVCC-STYLK-01	SRVCE-STYLK-01	—	—
Conversion to Three-Module Tablet Management Carts	SRVC-TMC-01	SRVC-TMC-01	SRVCC-TMC-01	SRVCE-TMC-01	Powered	5+
Power System Conversion SLA to Life StyleView Carts	SRVC-LiFeC-SV32 SRVC-LiFeC-SV42	—	—	—	Powered	10+
Preventive Maintenance, One Visit	—	SRVC-PMPNO-01	SRVCC-PMPNO-01	SRVCE-PMPNO-01	Powered	10+
Preventive Maintenance Visit, 3 Year StyleView Carts	SRVC-PMNP-03 (Canada only)	SRVC-PMNP-03	SRVCC-PMNP-03	SRVCE-PMNP-03	Non-powered	10+
	SRVC-PMP-03 (Canada only)	SRVC-PMP-03	SRVCC-PMP-03	SRVCE-PMP-03	Powered	10+
Integration & Preventive Maintenance Visit, 3 Year Combines Integration and 3-Year Preventive Maintenance StyleView Carts	SRVC-ANP-03A (Canada only)	SRVC-ANP-03A	SRVCC-ANP-03A	SRVCE-ANP-03A	Non-powered	10–99
	SRVC-ANP-03B (Canada only)	SRVC-ANP-03B	—	SRVCE-ANP-03B	Non-powered	100+
	SRVC-AP-03A (Canada only)	SRVC-AP-03A	SRVCC-AP-03A	SRVCE-AP-03A	Powered	10–99
	SRVC-AP-03B (Canada only)	SRVC-AP-03B	—	SRVCE-AP-03B	Powered	100+
Complete Service, 3 Year Combines Integration and 3-Year Preventive Maintenance with Battery Replacement StyleView Carts	SRVC-COMP-03 (Canada only)	—	—	—	Powered	10+
Annual Contract						
Next Business Day Service and Support Program						
Canadian customers call for availability and quote						
Bronze Non-Powered Carts & Wall Mounts Onsite Maintenance Package for Non-Powered Carts & Wall Mounts (includes a once per year per device onsite inspection and adjustment) to handle all in-warranty repairs	Point of Sale	12-Month	SRVC-AMUNP-B-POS			
		36-Month	SRVC-AMUNP-B36M			
Silver SLA StyleView Carts Onsite Maintenance Package to handle all in-warranty and post warranty repairs + one battery replacement (labor only) per cart (Customer must provide replacement batteries)	Point of Sale	12-Month	SRVC-AMUSLA-S-POS			
		36-Month	SRVC-AMUSLA-S36M			
Silver Plus SLA StyleView Carts Silver Package + one preventive maintenance per cart per year	Point of Sale	12-Month	SRVC-AMUSLA-S			
		36-Month	SRVC-AMUSLA-SP36M			
Gold SLA StyleView Carts Silver Package + one complete battery replacement per cart per year (includes labor & batteries)	Point of Sale	12-Month	SRVC-AMUSLA-SP			
		36-Month	SRVC-AMUSLA-G-POS			
Gold Life StyleView Carts Onsite Maintenance Package to handle all in-warranty and post warranty mechanical and power module repairs (includes battery replacement in the event of a failure)	Point of Sale	36-Month	SRVC-AMUSLA-G36M			
		60-Month	SRVC-AMUSLA-G			
Gold Life StyleView Carts Onsite Maintenance Package to handle all in-warranty and post warranty mechanical and power module repairs (includes battery replacement in the event of a failure)	Point of Sale	12-Month	SRVC-AMULIF-G-POS			
		36-Month	SRVC-AMULIF-G36M			
Platinum SLA StyleView Carts Gold SLA Support Package + once per year onsite preventive maintenance per cart	Point of Sale	60-Month	SRVC-AMULIF-G60M			
		12-Month	SRVC-AMUSLA-P-POS			
Platinum Life StyleView Carts Gold Life Support Package + once per year onsite preventive maintenance per cart	Point of Sale	36-Month	SRVC-AMUSLA-P36M			
		12-Month	SRVC-AMUSLA-P			
Five-Year Warranty Life StyleView Carts Extend the standard warranty on any Life-powered cart to cover all components for 60 months. Extra coverage guarantees the battery, power module and all electrical components	Point of Sale	12-Month	SRVC-AMULIF-P-POS			
		36-Month	SRVC-AMULIF-P36M			
Tablet & Laptop Charging Cart Onsite Maintenance Package to handle all in-warranty repairs	Point of Sale OR Post Sale	12-Month	SRVC-AMUTAB-G			
		12-Month	SRVC-AMUTAB-P			



Healthy mounting solutions for the entire enterprise

1 Reception



2 Waiting Area



3 Exam Room




4 Nurse Station



5 High-Traffic Area



6 Back Office



7 Operating Room



8 Cafeteria



13 In-Patient Floor




12 Radiology




11 Intensive Care



10 Conference Room



9 Emergency

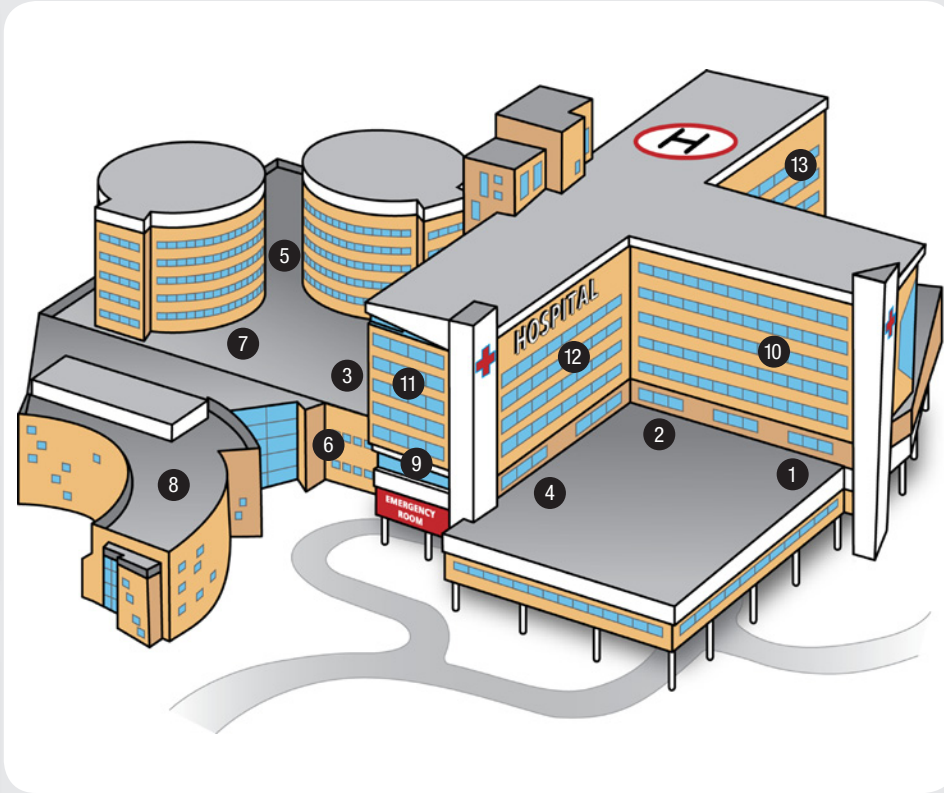

Care for the caregiver and back-office staff

See the payback when you stand up for your staff

For those stuck long hours sitting at a computer, standing a little more each day burns extra calories, tones muscles, improves posture, increases blood flow and ramps up metabolism.







RELIABLE!
20
YEARS



Healthcare experience backs up our industry-leading portfolio of scalable StyleView Carts

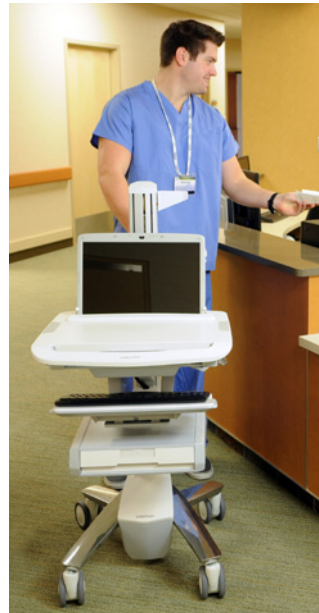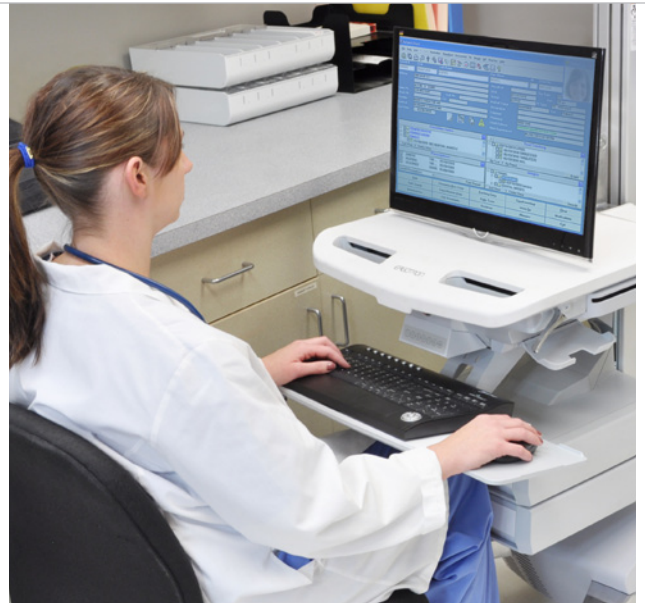

Nimble. Personalized. Safe and ergonomic.



twitter
@Ergotron

YouTube
youtube.com/ergotronguy

facebook
facebook.com/ergotroninc

© 2013 Ergotron, Inc. Literature made in US rev. 05/20/2013 870-01-012-EA Content is subject to change without notification
Ergotron devices are not intended to cure, treat, mitigate or prevent any disease

Americas Sales and Corporate Headquarters

St. Paul, MN USA
(800) 888-8458
+1-651-681-7600
www.ergotron.com
sales@ergotron.com

EMEA Sales

Amersfoort, The Netherlands
+31 33 45 45 600
www.ergotron.com
info.eu@ergotron.com

APAC Sales

Tokyo, Japan
www.ergotron.com
apaccustomerservice@ergotron.com

Worldwide OEM Sales

www.ergotron.com
info.oem@ergotron.com

