

ViewSonic® LED DISPLAY

VG2755-2K



Key Features

- USB Type-C
- WQHD 1440p resolution
- Frameless bezel
- SuperClear® IPS technology
- HDMI and DisplayPort inputs



Product Description

The ViewSonic VG2755-2K is a 27" (27" viewable) WQHD IPS monitor designed to fit the modern office space. The monitor comes with a built-in USB Type-C port. Charge and display content simply via a single cable from your device, enabling connection to your laptop through a single USB cable and keeping your workstation neat while also functioning as a docking monitor. The monitor utilises a SuperClear® IPS panel and features an upgraded 2560 x 1440 WQHD resolution, giving users a detailed display with sharper image quality from virtually any viewing angle. In addition, the monitor is equipped with DisplayPort, HDMI, and three USB 3.1 Type-A ports to expand your efficiency. The three-sided frameless bezel design lets you enjoy an uninterrupted view of content across multiple monitors. Advanced ergonomic design offers the widest range of adjustments for maximum comfort; including pivot, swivel, height, and an impressive 40° tilt, allowing you to use the monitor while standing or have strategic group discussions around the screen. The packaging is environmentally friendly and facilitates quick and easy setup, making the VG2755-2K a perfect tool for business environments.

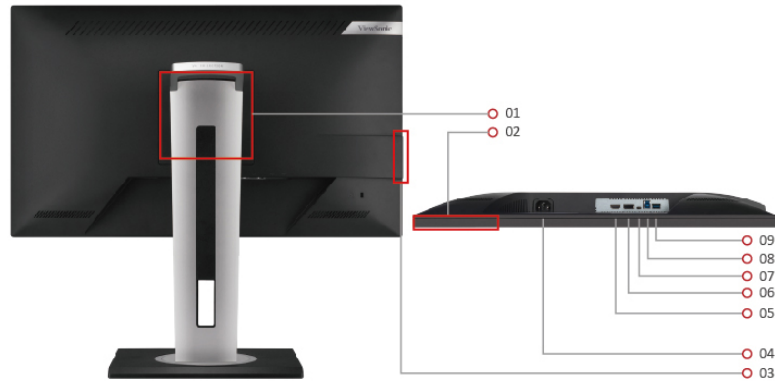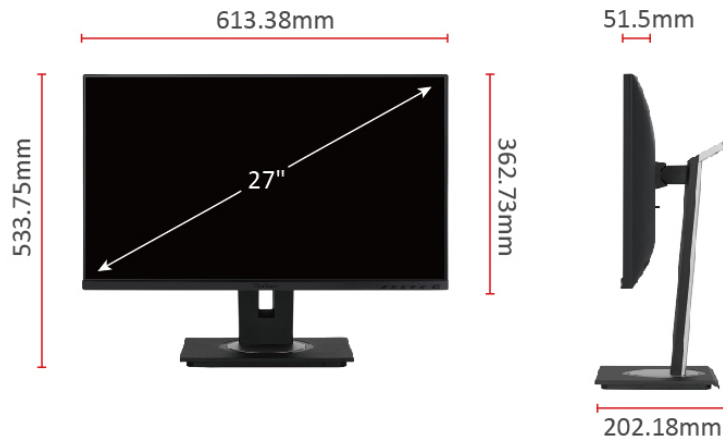

- 1. VESA Compatible (Wall mount 100 x 100 mm)
- 2. Menu Control Panel
- 3. USB 3.1 down stream x 2
- 4. AC In
- 5. HDMI
- 6. DisplayPort
- 7. USB Type C
- 8. USB up stream
- 9. USB down stream

Visit Us ■ www.viewsonic.com

LCD PANEL

Display Size (in.):	27
Viewable Area (in.):	27
Panel Type:	IPS Technology
Resolution:	2560 x 1440
Resolution Type:	QHD
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	80M:1
Brightness:	350 cd/m2 (typ)
Aspect Ratio:	16:9
Response Time (Typical GTG):	5ms
Response Time (GTG w/OD):	5ms
Viewing Angles:	178° horizontal, 178° vertical
Refresh Rate (Hz):	75
X Lighting:	Yes
Colour Gamut:	sRGB: 100% coverage (Typ)
Pixel Size:	0.233 mm (H) x 0.233 mm (V)

COMPATIBILITY

PC Resolution (max):	2560x1440
Mac® Resolution (max):	2560x1440
PC Operating System:	Windows 7/8/8.1/10 certified; macOS tested
Mac® Resolution (min):	2560x1440

CONNECTOR

USB 3.1 Type A:	3
USB 3.1 Type B:	1
USB 3.1 Type C:	1
HDMI 1.4:	1
Display Port:	1
Power in:	3-pin Socket (IEC C14 / CEE22)

AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

POWER

Eco Mode (Conserve):	17.73W
Eco Mode (optimised):	21.63W
Consumption (typical):	26.54W
Consumption (max):	31.32W
Voltage:	AC 100-240V, 50/60 Hz
Stand-by:	0.3W
Power Supply:	Internal

ADDITIONAL HARDWARE

Kensington Lock Slot:	1
-----------------------	---

CONTROLS

Physical Controls:	key 1(eye), key 2, key 3, key 4, key 5, key 6 (power)
On Screen Display:	Input Select, Audio Adjust, ViewMode, Colour Adjust, Manual Image Adjust, Setup Menu

OPERATING CONDITIONS

Temperature:	32°F to 104°F (0°C to 40°C)
Humidity (non-condensing):	20% to 90%

WALL MOUNT

VESA Compatible:	100 x 100 mm
------------------	--------------

INPUT SIGNAL

Frequency Horizontal:	15 ~ 90KHz
Frequency Vertical:	49 ~ 75Hz

VIDEO INPUT

Digital Sync:	TMDS - HDMI (v1.4), PCI-E - DisplayPort (v1.2), Micro-Packet - Type C
---------------	---

ERGONOMICS

Height Adjust (mm):	130
Swivel:	120°
Tilt (Forward/Back):	-5° / 40°
Pivot (Right/Left):	90° / 90°

WEIGHT (METRIC)

Net (kg):	6.9
Net Without Stand (kg):	4.5
Gross (kg):	10.2

DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	692 x 218 x 430
Physical (mm):	613 x 406~534 x 202
Physical Without Stand (mm):	613 x 363 x 52

GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, MX-CoC, Mexico Energy, CE, CE EMC, CB, RoHS, ErP, REACH, WEEE, TCO 7.0, EAC, UkrSEPRO, RCM, CCC, China RoHS, CEL
--------------	--

PACKAGE CONTENTS:	VG2755-2K x1 3-pin Plug (IEC C13 / CEE22) x1 DisplayPort Cable (Male-Male) x1 USB A/B Cable (v3.1; Male-Male) x1 Quick Start Guide x1
-------------------	---

Warranty:	*Warranty offered may differ from market to market
-----------	--